

SAW Filter 1250MHz

Model: TA0824A

Part No: MP02876

Rev No: 2

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

Terminating source impedance (differential): $Z_S = 180\Omega$ and matching network


Terminating load impedance (differential): $Z_L = 180\Omega$ and matching network

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency F_c	MHz	-	1250	-	-
Bandwidth at -3dB	MHz	96	114	-	-
Insertion Loss in 1202 ~ 1298MHz	dB	-	5.3	7	-
Amplitude ripple (1202MHz ~ 1298MHz)	dB	-	1.7	3	-
Amplitude ripple (1202MHz ~ 1298MHz) in any 6MHz channel	dB	-	0.6	2	-
Group Delay ripple (1202MHz ~ 1298MHz)	ns	-	8	60	-
Group Delay ripple (1202MHz ~ 1298MHz) in any 6MHz channel	ns	-	2.2	18	-
I/O Return Loss (1202MHz ~ 1298MHz)	dB	9	12	-	-
Attenuation (Reference level from 0dB)					
500 ~ 1050MHz	dB	45	52	-	-
1050 ~ 1150MHz	dB	30	49	-	-
1350 ~ 1440MHz	dB	12	25	-	-
1440 ~ 2000MHz	dB	45	50	-	-


SAW Filter 1250MHz
Part No: MP02876

Model: TA0824A
Rev No: 2


C. OUTLINE DRAWING:

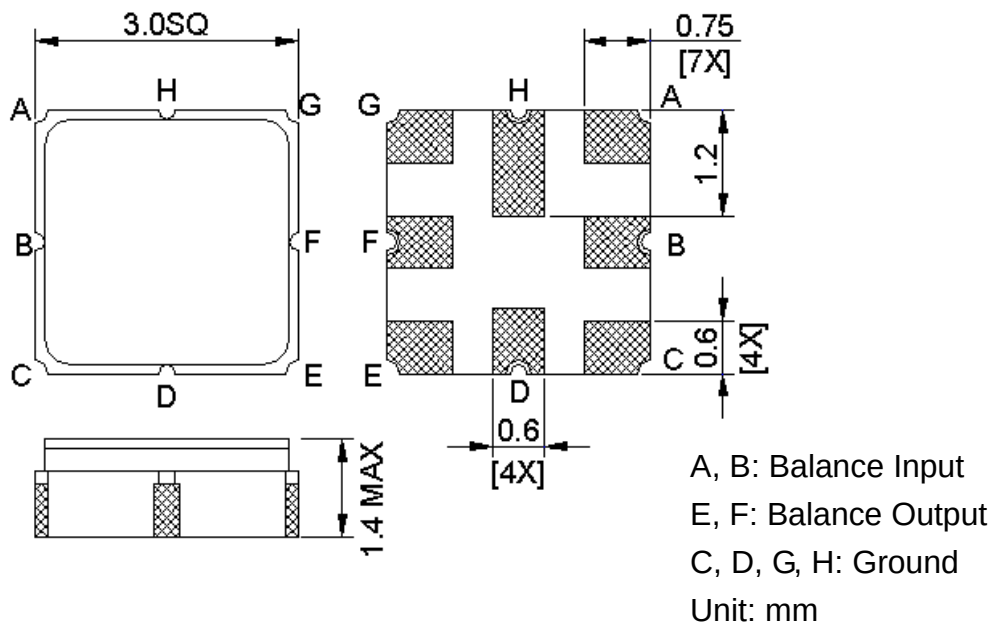

D. MEASUREMENT CIRCUIT:

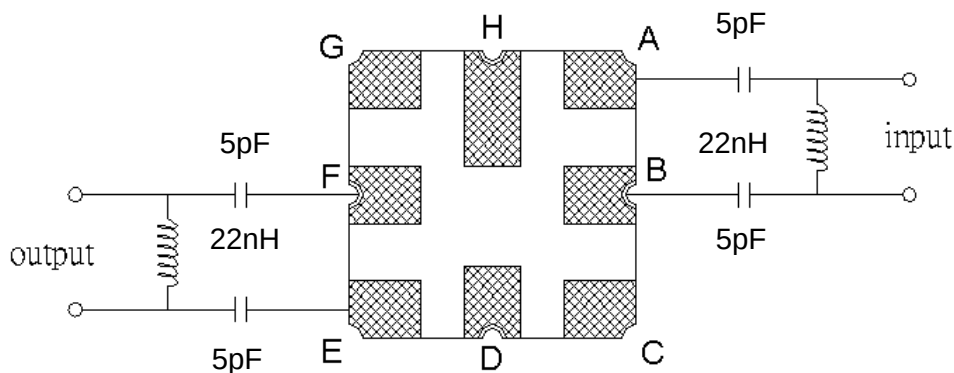



E. PCB FOOTPRINT:

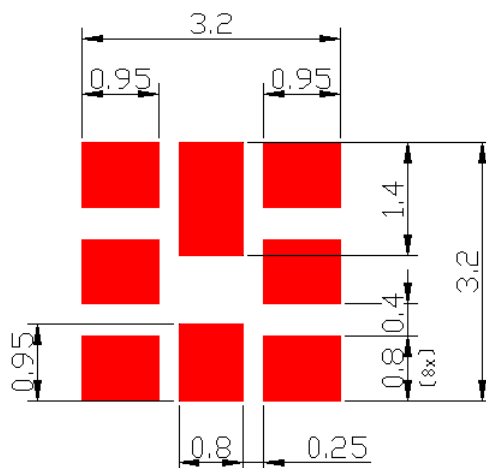

SAW Filter 1250MHz
Part No: MP02876

Model: TA0824A
Rev No: 2

F. FREQUENCY CHARACTERISTICS:

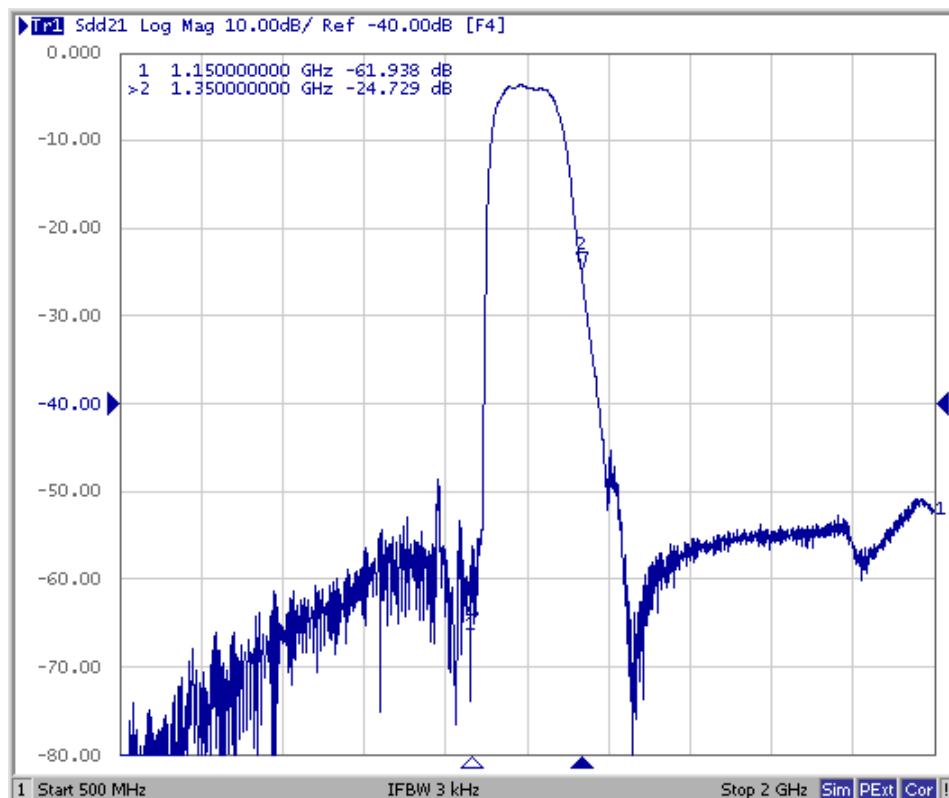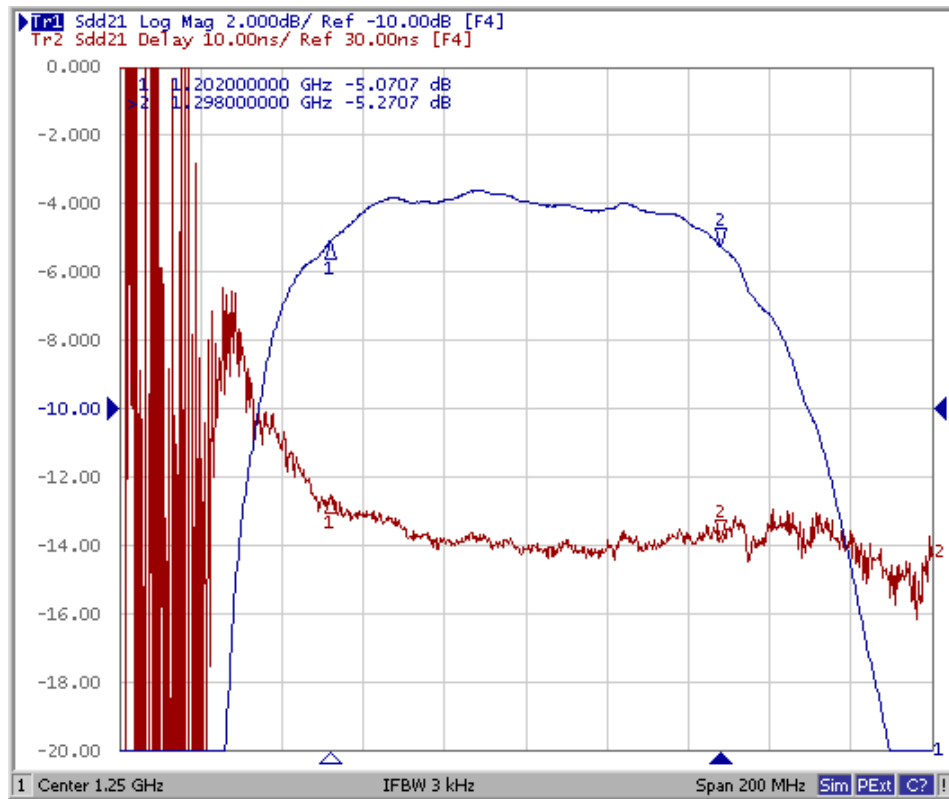

SAW Filter 1250MHz
Part No: MP02876


Model: TA0824A
Rev No: 2

Reflection Functions

S11



S22

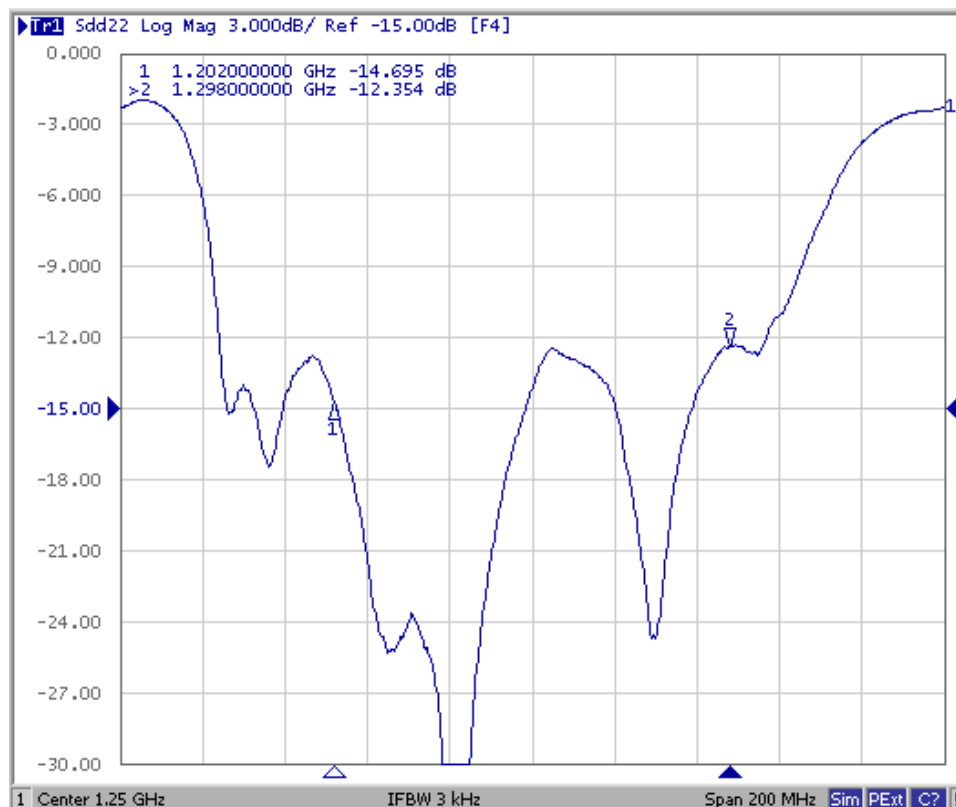


SAW Filter 1250MHz
Part No: MP02876

Model: TA0824A
Rev No: 2


G. PACKING:

1. REEL DIMENSION

(Reel Count: 7" = 1000; 13" = 3000)

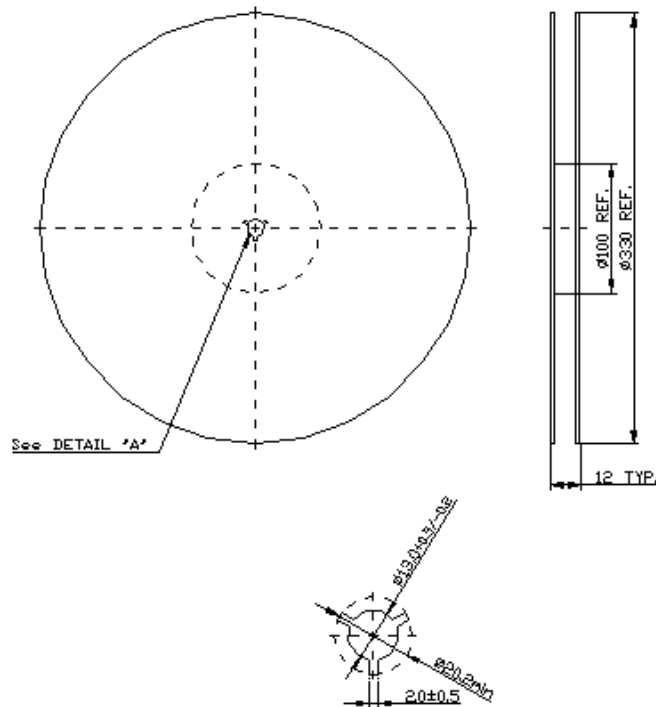

2. TAPE DIMENSION

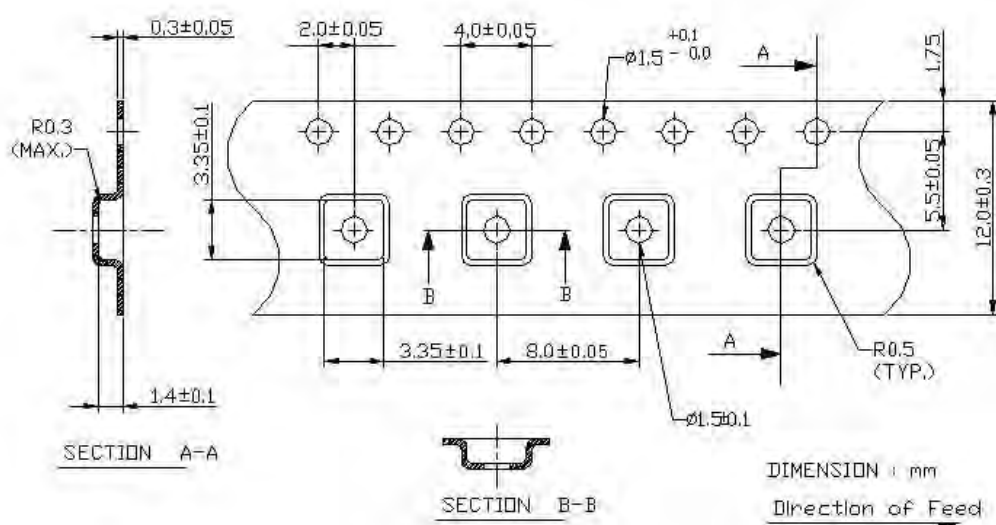

SAW Filter 1250MHz
Part No: MP02876

Model: TA0824A
Rev No: 2

H. RECOMMENDED REFLOW PROFILE:

