

465.0MHz SAW Filter

Model: **TA465FD**

Part No: **MA06601**

REV NO.: 3

A. MAXIMUM RATING:


1. Input Power Level: 0dBm
2. DC voltage: 10 V
3. Operating Temperature: -10°C to +50°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Characteristics	Specification	Note
Center frequency F_C (MHz)	465	1
I.L. (Within $F_C \pm 2$ MHz) (dB)	4.0 max.	
Ripple(Within $F_C \pm 2$ MHz) (dB)	2.0 max.	1
Attenuation:(Reference level from 0 dB) (dB)		
$F_C - 100$ MHz to -45MHz (dB)	50 min.	1
$F_C + 45$ MHz to + 100MHz (dB)	50 min.	
Impedance at F_C ; Input $Z_{IN} = R_{IN} // C_{IN}$	50Ω // 0PF	2
Output $Z_{OUT} = R_{OUT} // C_{OUT}$	50Ω // 0PF	2

Note1. The standard definitions is in JIS C 6703

Note2.

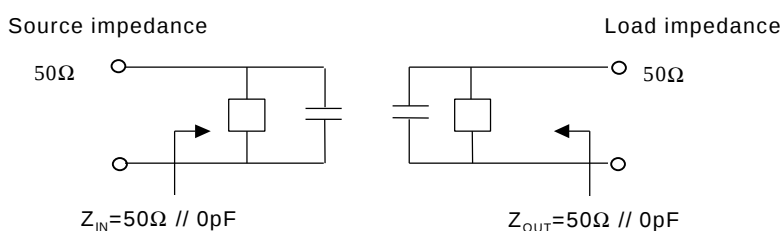



465.0MHz SAW Filter

Model: TA465FD

Part No: MA06601

REV NO.: 3

C. FREQUENCY CHARACTERISTICS:

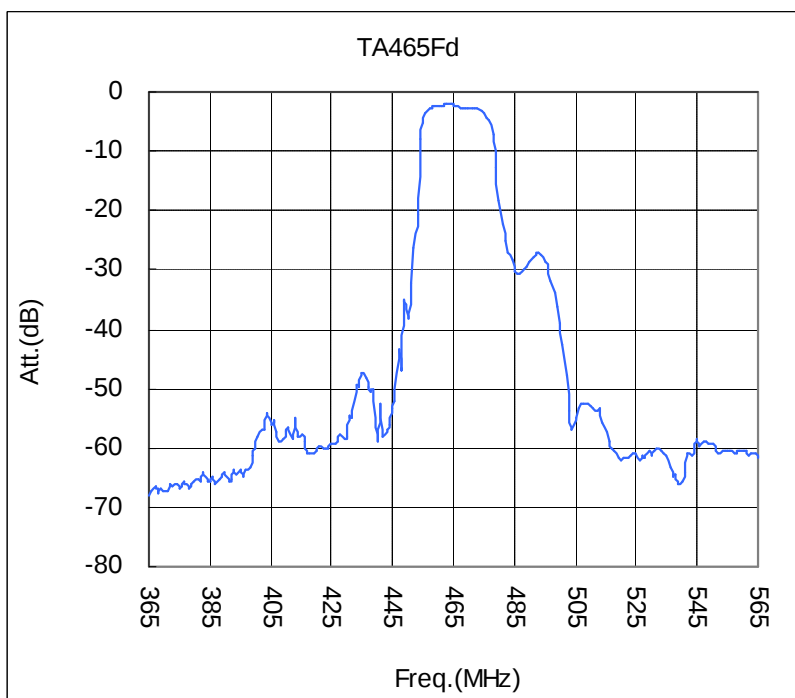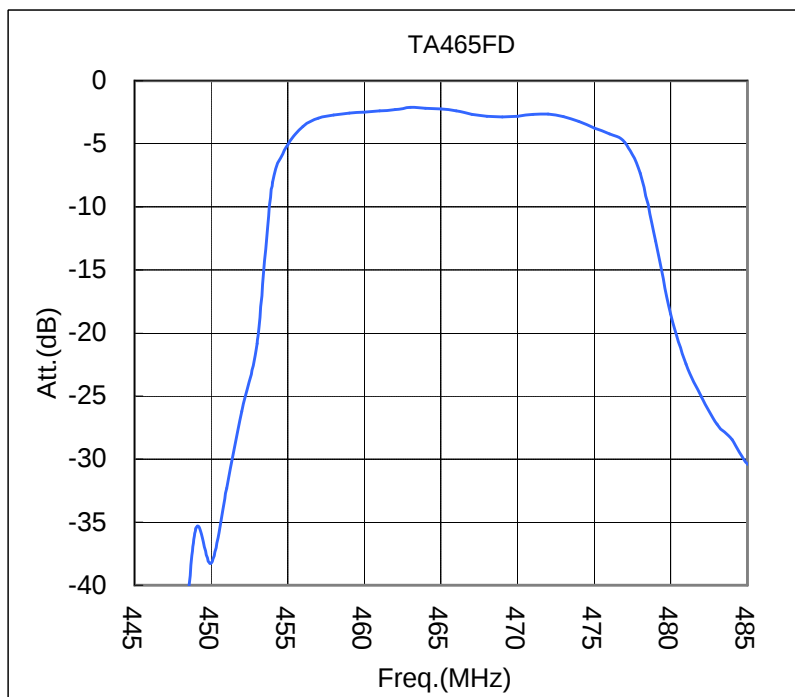


465.0MHz SAW Filter

Model: **TA465FD**


Part No: **MA06601**

REV NO.: 3

D. MEASUREMENT CIRCUIT:

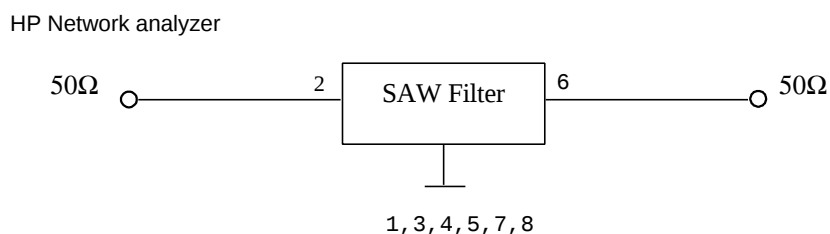


E. OUTLINE DRAWING:

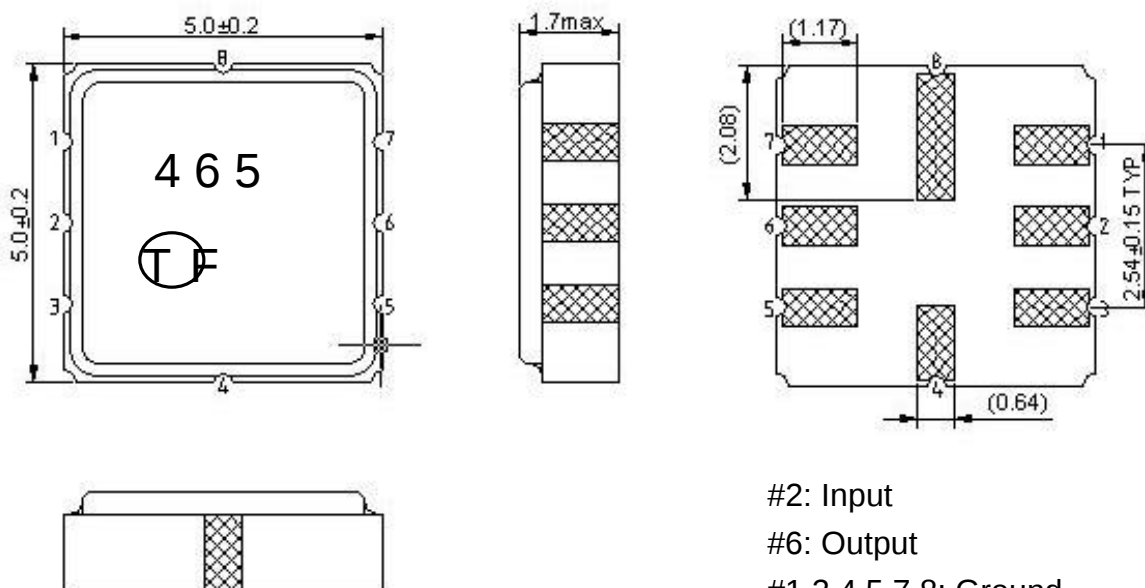

#2: Input
 #6: Output
 #1,3,4,5,7,8: Ground
 Unit: mm

F. PCB FOOTPRINT:

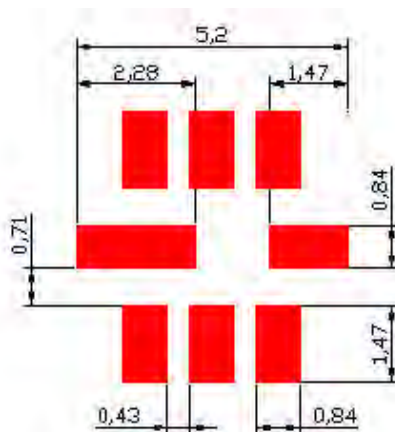

465.0MHz SAW Filter


Model: TA465FD

Part No: MA06601

REV NO.: 3

G. PACKING:

1. REEL DIMENSION

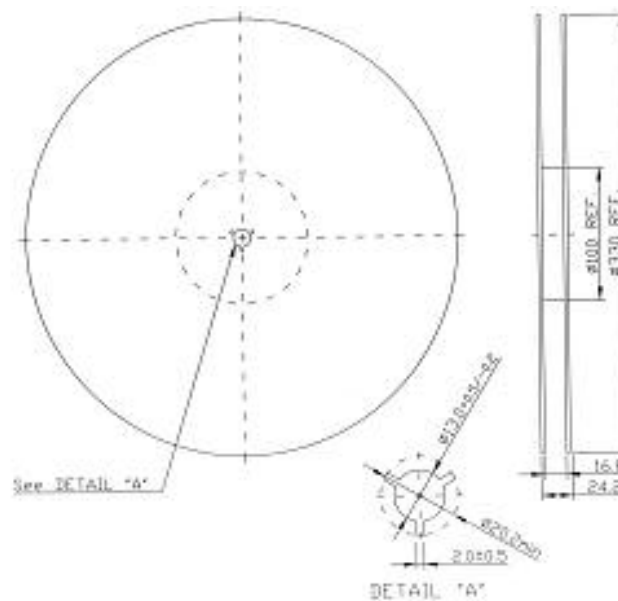

2. TAPE DIMENSION

