

SAW Filter 150.0MHz

Model: TB1004A

Part No: MP04686

Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)

1. Operating Temperature: -40°C ~ +85°C
2. Storage Temperature: -40°C ~ +85°C
3. Input power: 10dBm

B. CHARACTERISTICS:

Ambient Temperature: 25°C

Characteristics	Value			Note
	Min.	Typ.	Max.	
Center frequency Fc MHz	-	150.0	-	-
Minimum Insertion loss IL dB	-	15.5	18	-
1dB BW MHz	50	52.5	-	-
Return Loss		3.7		
VSWR		4.7		
Phase linearity deg		4.2	6	
Rejection at Fc ± 35MHz	40	44		
Rejection at Fc ± 75MHz	45	52		
Rejection at Fc ± 100MHz	45	53		
Rejection from DC ~ 50MHz	50	53		
Rejection from 250 ~ 590MHz	35	38		
Substrate Material	YZ-LiNbO3			-
Temp Coefficient ppm/K	-	-94	-	-
Matching: 1.The input of the filter will be matched to 50 ohm 2.The output of the filter will be matched to 50 ohm				

SAW Filter 150.0MHz


Model: TB1004A

Part No: MP04686


Rev No: 1

C. FREQUENCY CHARACTERISTICS:

1. S21 Response: (span: 200MHz)

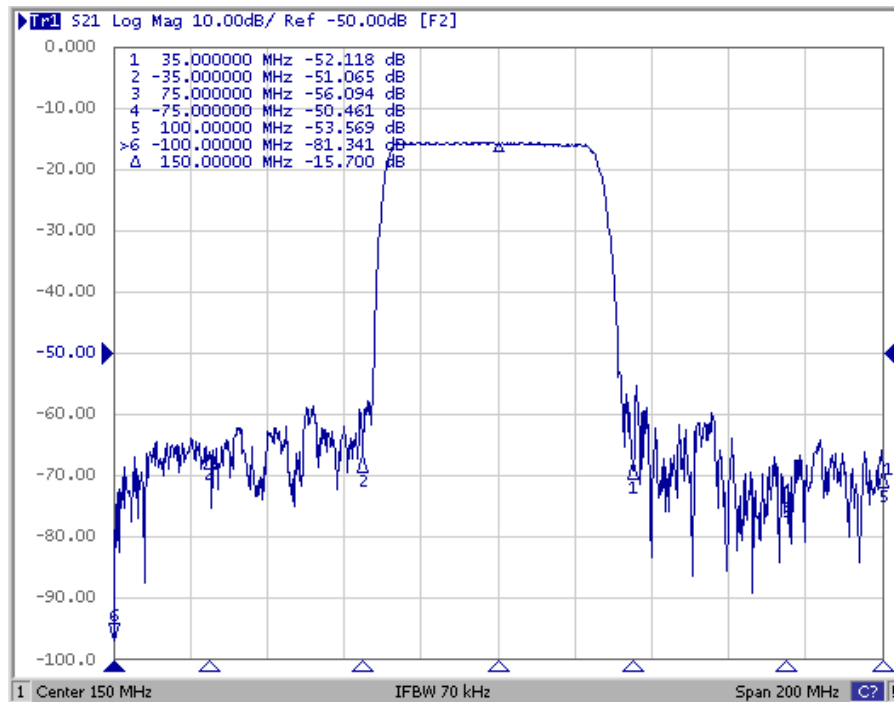


2. Pass-band Response: (span: 70MHz)

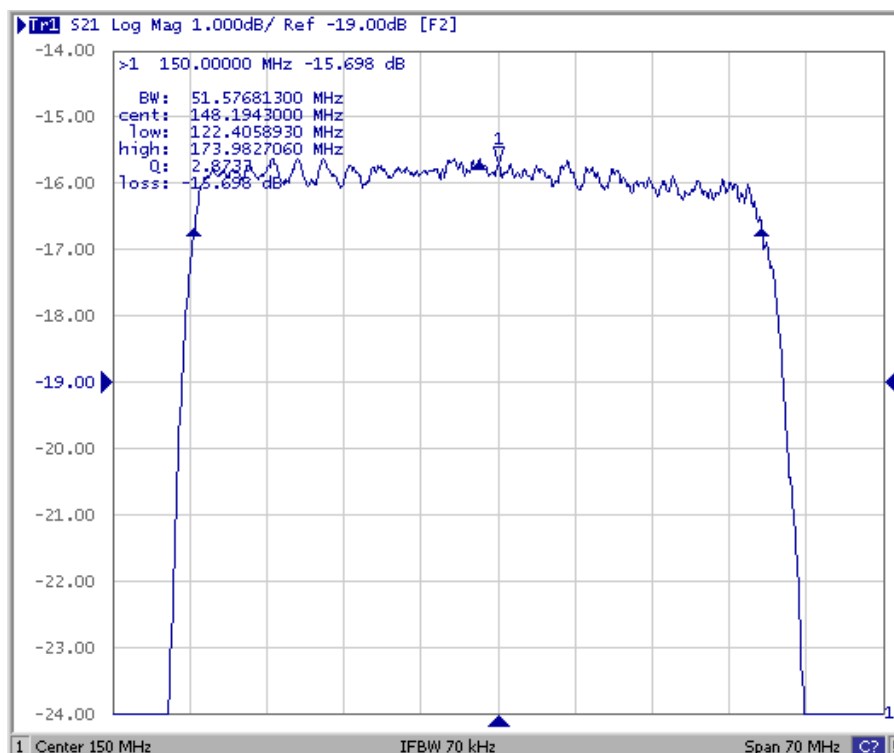


SAW Filter 150.0MHz
Part No: MP04686

Model: TB1004A
Rev No: 1

3. S11 Smith Chart: (span: 200MHz)

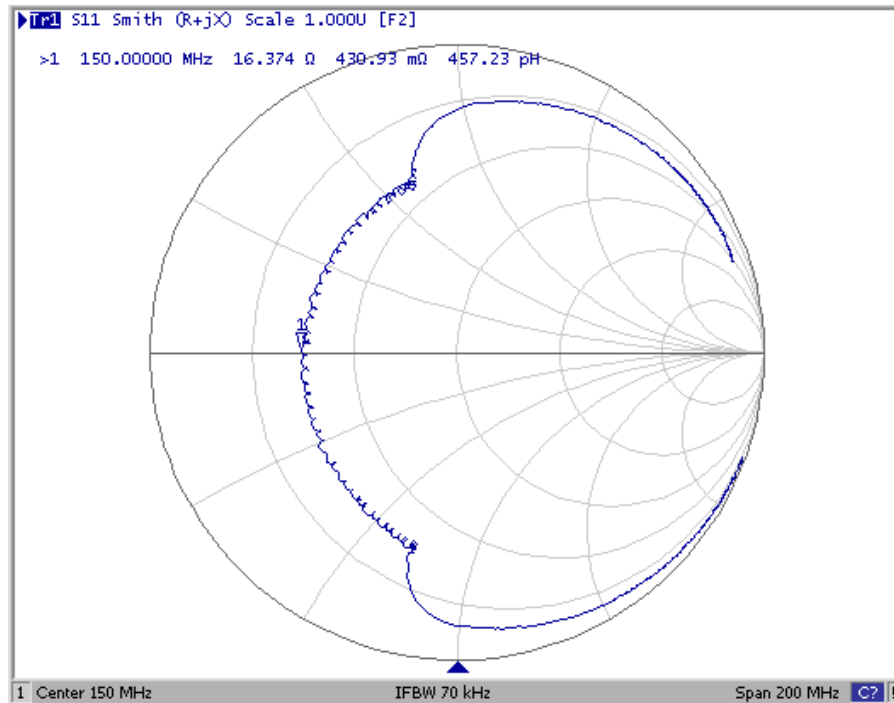


4. S22 Smith Chart (span: 200MHz)

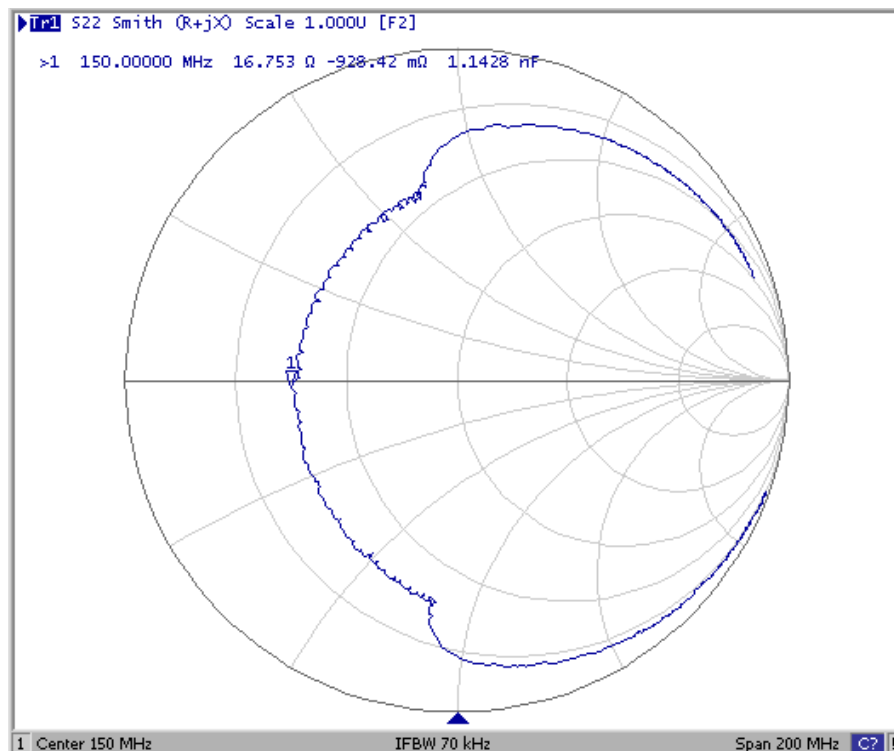


SAW Filter 150.0MHz
Part No: MP04686

Model: TB1004A
Rev No: 1

5. S11 & S22 Smith Chart (span: 80MHz)

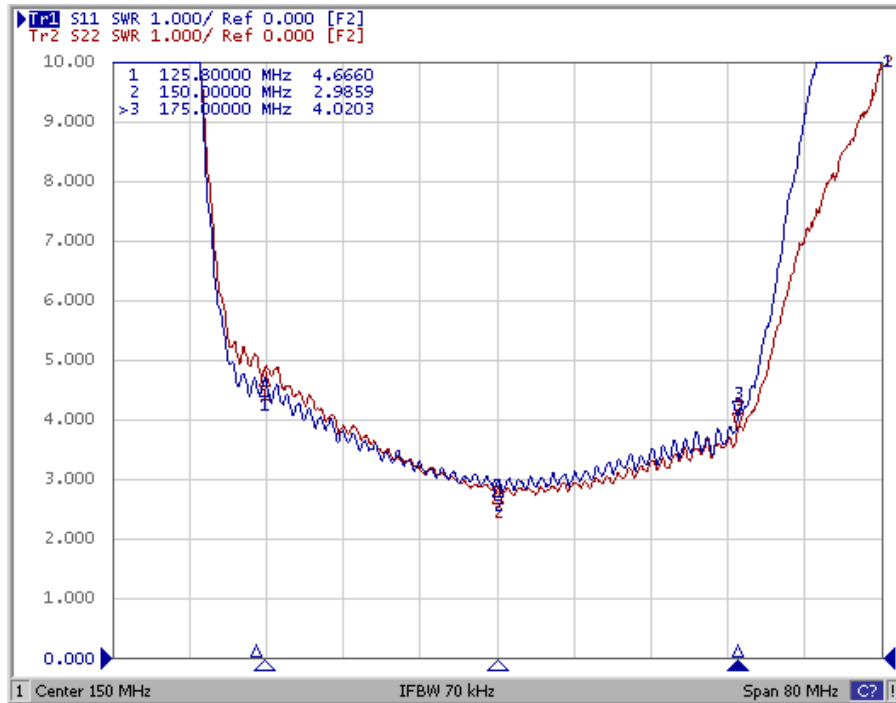

D. MEASUREMENT CIRCUIT:

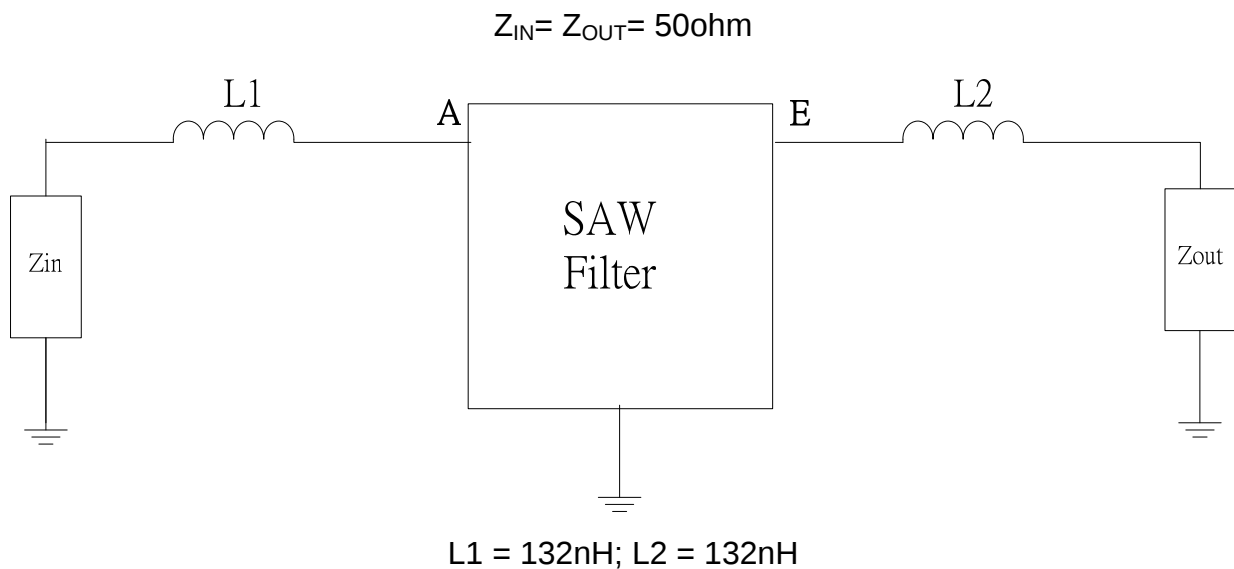


SAW Filter 150.0MHz

Model: TB1004A

Part No: MP04686


Rev No: 1

E. OUTLINE DRAWING:

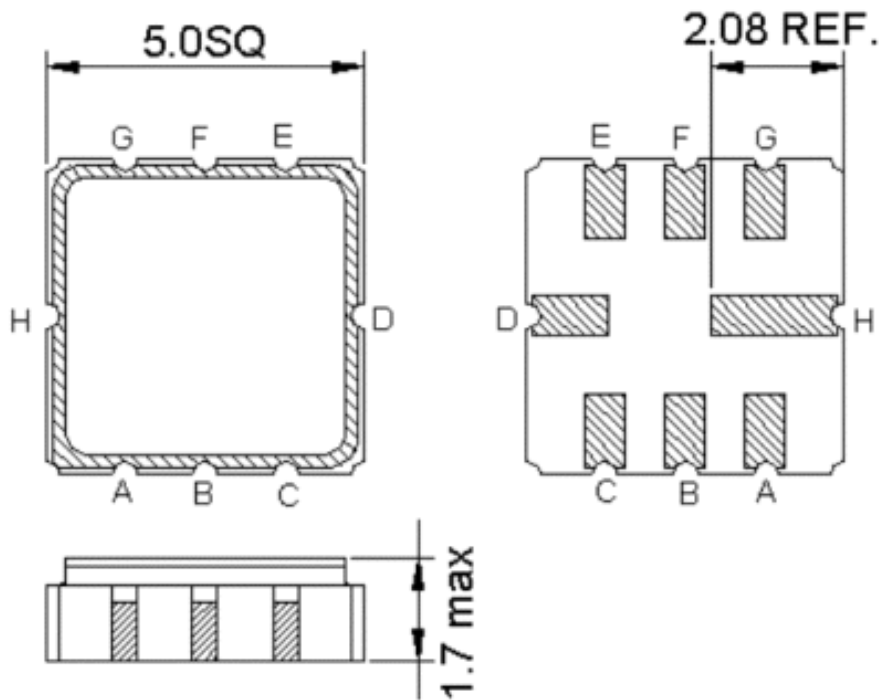

C: RF input
G: RF output
H, D: Case Ground
Pin A, B, E, F: Ground
Unit: mm

F. PCB FOOTPRINT:

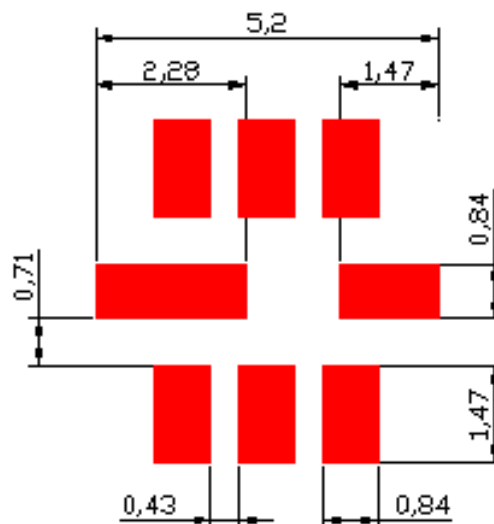


SAW Filter 150.0MHz
Part No: MP04686


Model: TB1004A
Rev No: 1

G. PACKING:

1. Reel Dimension

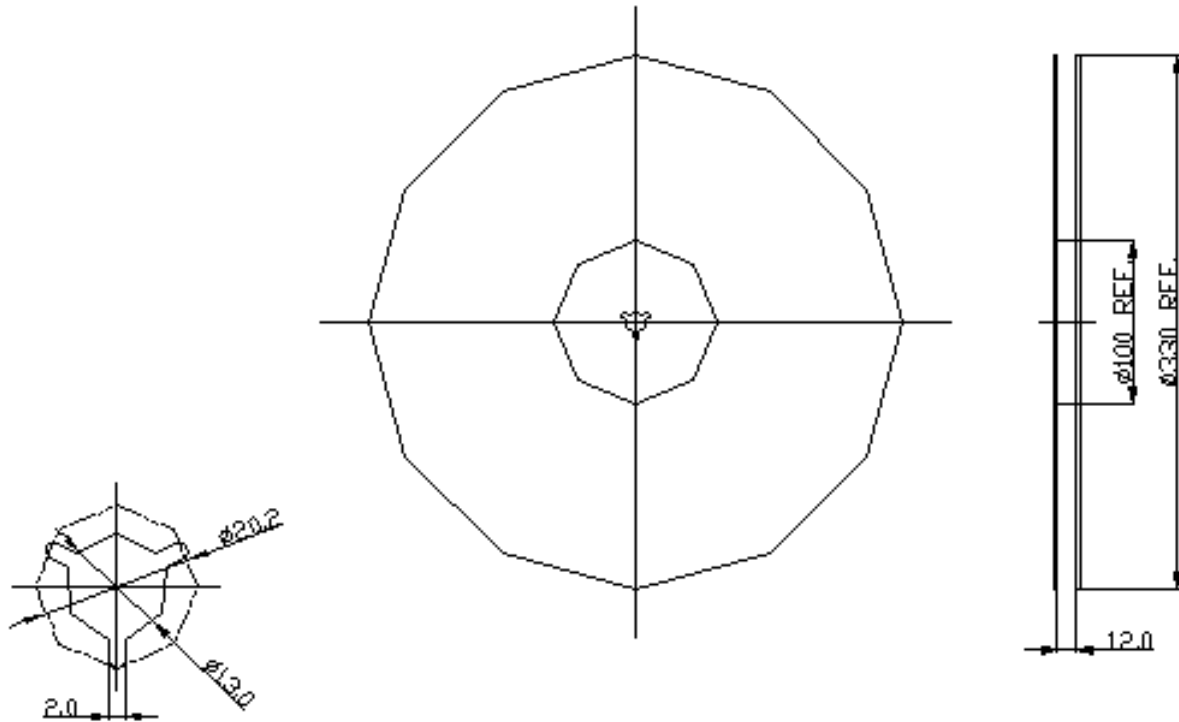

2. Tape Dimension

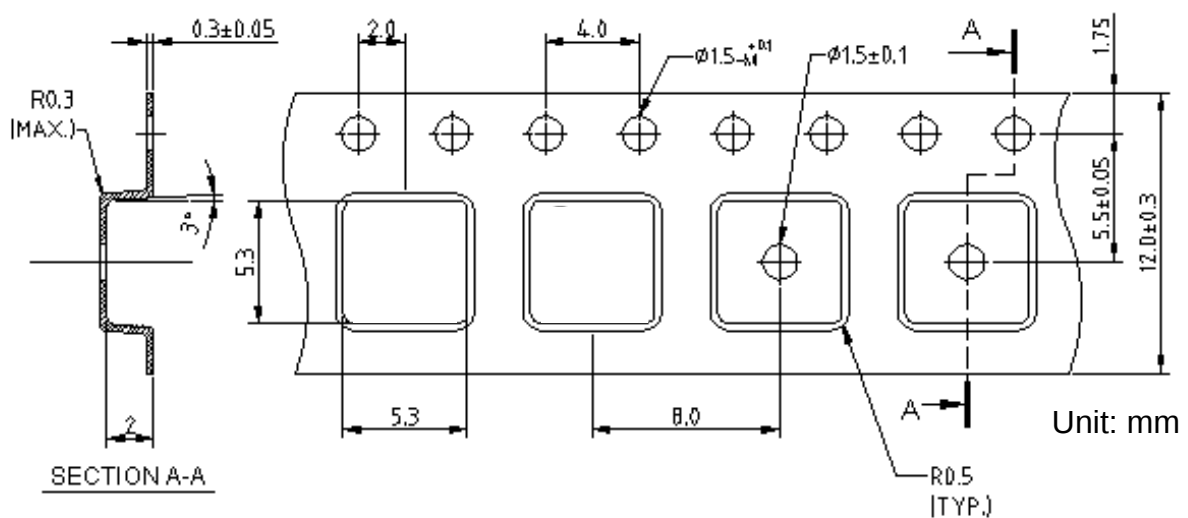

SAW Filter 150.0MHz

Model: TB1004A

Part No: MP04686

Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

