

GMCF-45

45G20A3

45MHz 2 pole crystal filter with
20.0kHz 3dB bandwidth

- Custom specifications available
- Fundamental or 3rd overtone modes
- Comprehensive stocks





CONFIGURABLE OPTIONS

Parameter	Option Code
-----------	-------------

PACKAGE DRAWING

Package Options

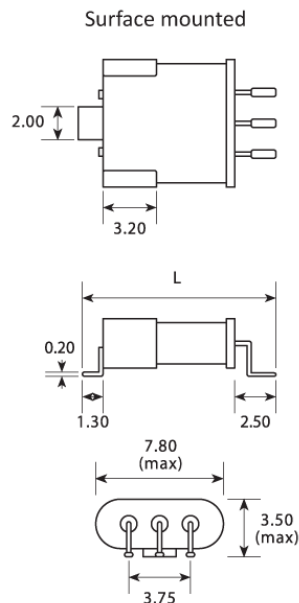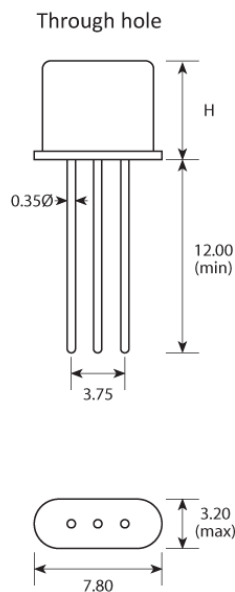

Package	Height H
UM-1/3L	8.00 max
UM-5/3L	6.00 max

Package	Length L
UM-1JN/3L	12.50 max
UM-5JN/3L	10.50 max

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GMCF-45 45G20A3 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE

Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

CONSTRUCTION

Resistance weld

COMPLIANCE

Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions.