

GVXO-44F

3.3V VCXO - High Frequency

- Low cost for volume applications
- Choice of pullability & stability
- Express deliveries for non-standard items
- Industrial temperature range option




CONFIGURABLE OPTIONS

Parameter	Option Code
Frequency	
Frequency pullability	
Any	
±50ppm min	N
±100ppm min	S
±150ppm min	W
Frequency stability	
Any	
±100ppm max	A
±50ppm max	B
±25ppm max	C
±20ppm max	D
±15ppm max	E
Operating temperature range	
Any	
-10 to +70°C	
-40 to +85°C	I

SPECIFICATIONS

Frequency range	33.0 ~ 125MHz
Dimensions	20.80 x 13.08 x 5.70mm
Package	14 pin DIL (full size)
Voltage control	+1.65V \pm 1.65V, 10% linearity > 100k Ω input impedance
Ageing	\pm 5.0ppm max per year
Storage temperature range	-55 to +125 °C
Supply voltage (V _{DD})	+3.3V (\pm 5%)
Supply current	18mA max (33.0 ~ 45.0MHz) 20mA max (>45.0 ~ 80.0MHz) 25mA max (>80.0 ~ 125MHz)
Driving ability	30pF HCMOS 5 LSTTL
Logic levels	'0' level = +0.4V max '1' level = 90%V _{DD} min
Waveform symmetry @ 50%V _{DD}	40:60 max
Rise / fall time	5ns max (0.4V ~ 90%V _{DD} min)

PACKAGE DRAWING

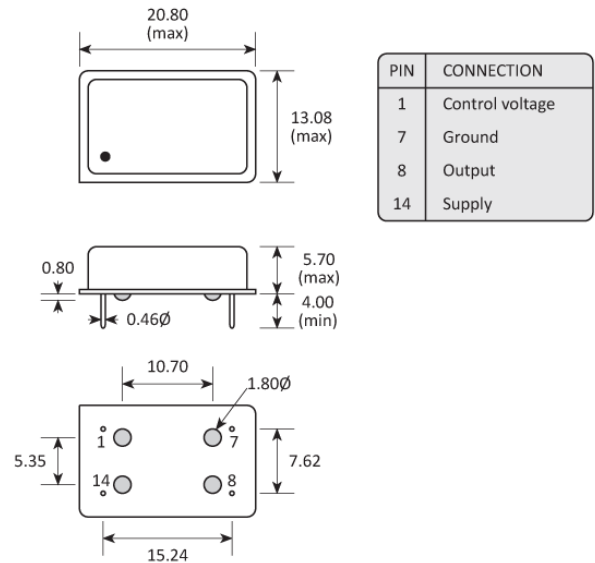

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GVXO-44F please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

CONSTRUCTION

Resistance weld

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions.