


HC49

Standard Crystal


- Industry standard HC49 case
- Fundamental mode available up to 40.0MHz
- Tight specifications available
- Wide frequency range available

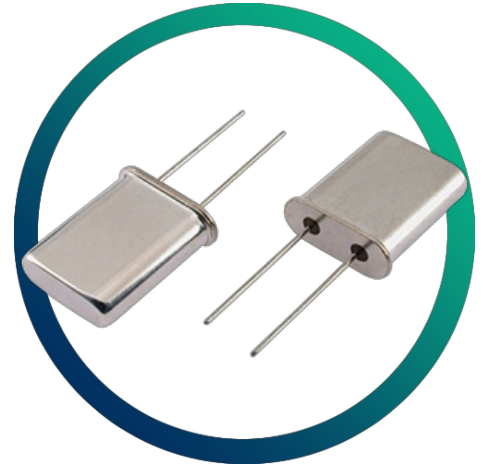

CONFIGURABLE OPTIONS

Parameter	Option Code
-----------	-------------

PACKAGE DRAWING

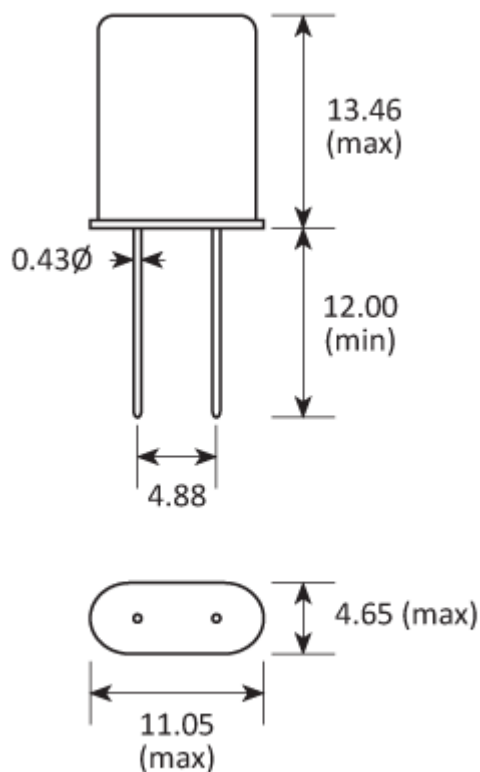

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the HC49 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

CONSTRUCTION

Resistance weld

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions.



Nominal Net Mass: 840mg