


MCSO2EHW

2.5 / 3.3 / 5V CMOS Oscillator - 55+210°C



- Suitable for Avionics, Down-hole, Geothermal etc
- Extreme temperature ranges up to 210°C
- High stability & low ageing under extremes
- High shock & vibration resistance
- Optional tinned pads (Ag/Cu/Zn)

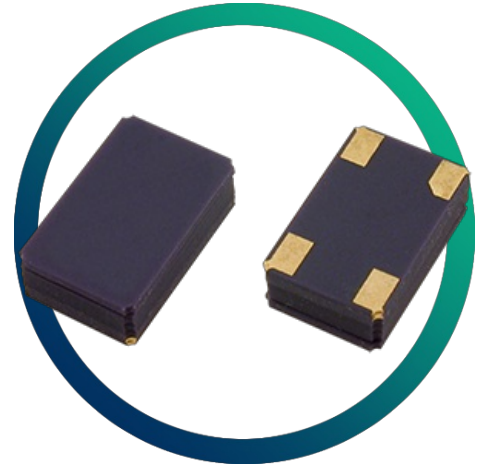

CONFIGURABLE OPTIONS


Parameter	Option Code
-----------	-------------

PACKAGE DRAWING



PAD	CONNECTION
1	Not connected or Enable/Disable
2	Ground
3	Output
4	Supply

SOLDER PAD LAYOUT



TOP VIEW

A 47nF ceramic capacitor must be connected between GND and VDD

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the MCSO2EHW please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

ENABLE / DISABLE FUNCTION

Input (pad 1)	Output (pad 3)
Open	Enabled
'1' level	Enabled
'0' level	No clock

Reaction time <1 μ s

CONSTRUCTION

Ceramic base and lid

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions.