


RV8564C3

RTC I²C bus


- Sub miniature size
- AEC-Q200 compliant option
- Compliant with I2C-Bus interface (400kHz)
- Built in crystal for adjustment-free operation
- Programmable alarm, timer and interrupt functions

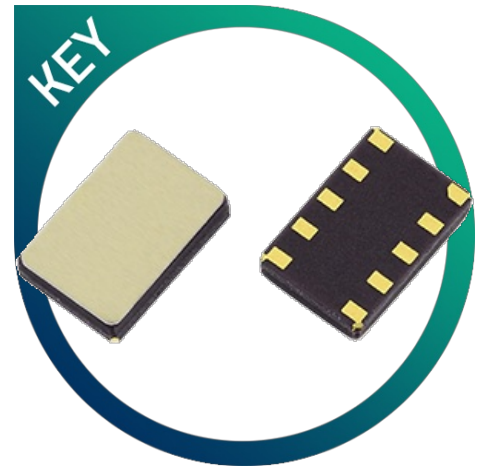

CONFIGURABLE OPTIONS

Parameter	Option Code
-----------	-------------

PACKAGE DRAWING

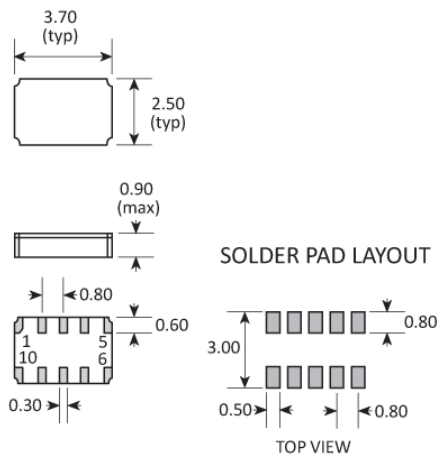

PAD	CONNECTION	PAD	CONNECTION
1	Clock output enable (CLKOE)	6	Interrupt output ($\overline{\text{INT}}$)
2	Supply (VDD)	7	Ground (GND)
3	Clock output (CLKOUT)	8	Not connected
4	Serial clock input (SCL)	9	Not connected
5	Serial data (SDA)	10	Not connected

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the RV8564C3 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

TAPE & REEL SPECIFICATION



A:178* B:12 C:4 D:2.7 E:4 F:1 G:80 H:21

*Larger reel size available. Please ask for details

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

CONSTRUCTION

Ceramic package

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions.