

SCOCXOHSV

3.3V & 5V OCXO Sine Output


- Excellent phase noise perforamce @ 100MHz
- -160dBc noise floor @ 10.0MHz
- Fundamental mode frequencies up to 120MHz
- Compact 14-pin DIL package (SMD optional)
- High shock and vibration resistance





CONFIGURABLE OPTIONS

Parameter Option Code

PACKAGE DRAWING







| PIN | CONNECTION |
|-----|-----------------|
| 1 | Freq adjustment |
| 7 | Ground |
| 8 | Output |
| 14 | Supply |

Dimensions in mm

ORDERING INFORMATION


To request a quotation for the SCOCXOHSV please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.


If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.



SOLDERING PROFILE



TAPE & REEL SPECIFICATION

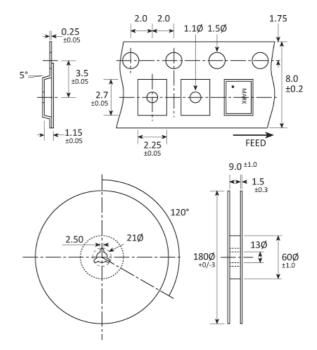

Dimensions in mm

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

CONSTRUCTION

Resistance weld

COMPLIANCE



RoHS compliant with no exemptions.