

SCOCXOHV

3.3V & 5V OCXO CMOS Output

- Excellent phase noise performance @ 100MHz
- -160dBc noise floor @ 10.0MHz
- Fundamental mode frequencies up to 120MHz
- Compact 14-pin DIL package (SMD optional)
- High shock and vibration resistance




CONFIGURABLE OPTIONS

Parameter

Option Code

PACKAGE DRAWING

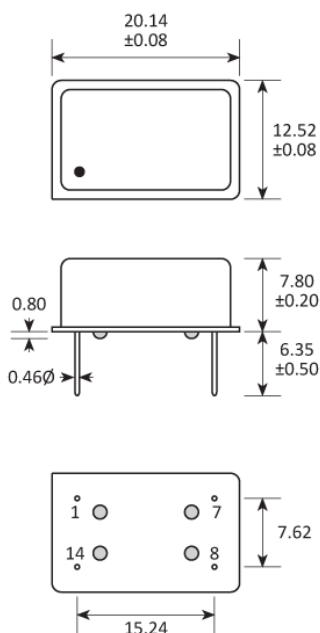

PIN	CONNECTION
1	Freq adjustment or Ground
7	Ground
8	Output
14	Supply

ORDERING INFORMATION

To request a quotation for the SCOCXOHV please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

Dimensions in mm

HANDLING & STORAGE

Human Body Model (HBM) 1A (250V to < 500V)



Moisture Sensitivity Level (MSL): 1

CONSTRUCTION

Resistance weld

COMPLIANCE

RoHS compliant with no exemptions.